



## Standard Probes

## Surface Following Probes

Surface Following Probes are fitted with a unique patented swivel head which allows the coil to follow curvilinear surfaces without the need to keep the handle perpendicular to the inspection zone. The 1.00 head diameter also allows the operator to inspect under minimal clearance features.

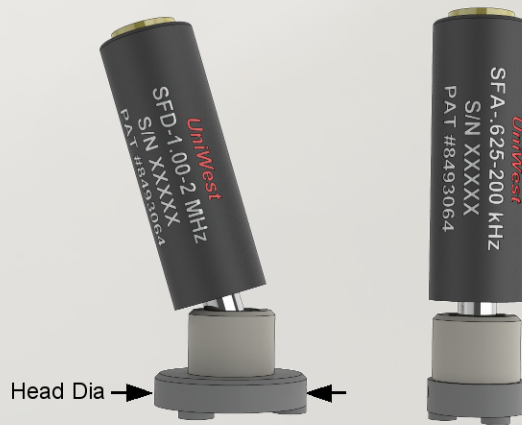

A Probe Style	B Head Ø inches (mm)		C Frequency			Connector
	.625 (15.9)	1.00 (25.4)	20 kHz	200 kHz	2 MHz	
SFA - (Reflection Absolute)	✓	✓	✓	✓	✓	4-Socket Fischer
SFD - (Reflection Differential)	✓	✓		✓	✓	4-Socket Fischer
SFX - (Cross Wound)	✓	✓			✓	Triax

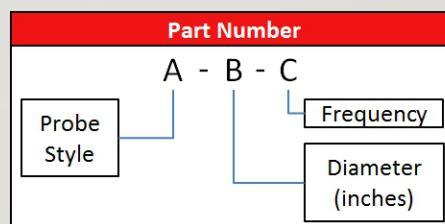

### EXAMPLES:

SFA-1.00-20 kHz  
 SFX-.625-2 MHz

### CABLES:

P/N 92836 8-pin Burndy/Triax  
 P/N 94032 8-pin Burndy/4-pin Fischer  
 P/N 72871 27-pin Fischer/Triax  
 P/N 72872 27-Pin Fischer/4-pin Fischer